

# Specification



Model	JIVA HS-2308	JIVA HS-2310
Processor	Intel Pineview dual core D525 CPU, 1.8GHz, 1M Cache	
System Memory	DDR3 800MHz, SO-DIMM x 1, max. 4GB; factory default 1GB	DDR3 800MHz, SO-DIMM x 1, max. 4GB; factory default 2GB
Storage Device	2.5" SATA HDD and/or SSD; factory default 16GB SSD x 1	2.5" SATA HDD and/or SSD; factory default 320GB HDD x 1
Display	8" 800 x 600 LCD panel	9.7" 1024 x 768 LCD panel
Touch	5-wire resistive touch panel	5-wire resistive touch panel (Bezel-free)
Built-in Printer	3" thermal printer with auto cutter, 200mm/sec print speed	
Power Supply	12V DC power adaptor, 120W	
OS Support	Windows 7 / POSReady 7 / Windows XP Pro / POSReady 2009 / Linux	
<b>Connectivity</b>		
LAN Port	10 / 100 / 1000Mb x 1	
Serial Port	DB9 x 2 + RJ45 x 1 with 5V/12V support on COM1 / COM2 / COM3, RJ-45 to DB9 cable optional	
Parallel Port	Yes	
Standard USB Port	5	
Audio Port	Line out	
PS/2 Port	Yes	
VGA Port	D-SUB, 15 pins, with 12V support for Posiflex monitor	
Mini-PCIe slot	Yes, for half size card	
CR Port	1, control 2 CR	1, control 2 CR
<b>Physical Dimension</b>		
Dimension (W x D x H in mm)	205 x 185 x 362	224.5 x 185 x 387
Weight (N.W. in Kg)	4.1	4.2
<b>Environment</b>		
Operation Condition	0°C - 40°C, 20%RH - 90%RH (Equipped with HDD) ; 0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)	
Storage Condition	(-20°C) - 70°C, 10%RH - 90%RH	
<b>Options</b>		
SSD	16GB minimum	
MSR	Integrated 3 track module	
Smartcard Reader	Integrated	
RFID	Integrated, support MIFARE ultralight and classic 1K card	
Finger Print Sensor	Integrated	
LM-6507	7" 800 x 480 rear-mount 2nd display for JIVA HS Series (USB interface)	
PD-6507	7" color graphical line display, rear-mount (USB interface)	
PD-2607UE	2 x 20 VFD, rear-mount, USB with Virtual COM support	
PD-340UE	2 x 20 LCD, rear-mount, USB with Virtual COM support	
WIFI	Internal mini-PCIe WIFI module with PIFA antenna	
Certifications		

## JIVA HS Series

### Taking Space Saving To Extreme



Design and Manufacturing In Taiwan by Posiflex Technology Inc.  
The product information and specifications are subject to change without prior notice.

2013Q3C1



**Posiflex Technology Inc. (Headquarters)**  
**TEL** +886-2-2299-1599 **FAX** +886-2-2299-1819  
**MAIL** sales@posiflex.com.tw **WEB** www.posiflex.com  
 No. 6, Wuquan Rd., Wugu Dist., New Taipei City 24886, Taiwan

Authorized Distributor / Reseller

SINCE 1984

www.posiflex.com

# JIVA HS Series

## Taking Space Saving To Extreme

**POSIFLEX**  
Your Success is Our Vision



- Compact all-in-one terminal with footprint no larger than a standard receipt printer
- Built-in 3" thermal printer
- Optional built-in MSR, smartcard reader, finger print sensor and RFID reader
- Intel Pineview D525 dual core CPU, 1.8GHz
- 8"/9.7" LCD display with resistive touch
- 5 x USB, 3 x Serial (2 x DB9 + 1 x RJ45), 1 x CR, 1 x LAN, PS/2 & Parallel



Adjustable screen



Built-in 3" thermal printer



Easy paper roll access




8"/9.7" LCD display with resistive touch



Optional 2nd display



Optional built-in MSR, smartcard reader, finger print sensor and RFID reader

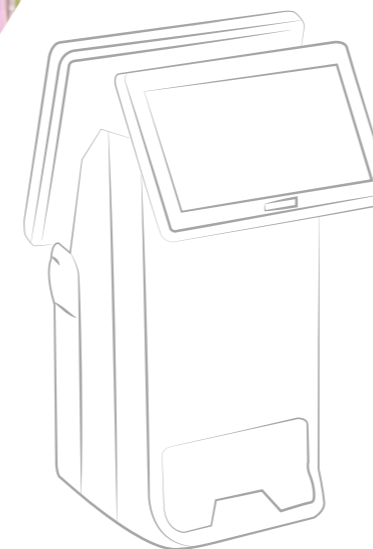

The main purpose of an All-in-One unit is space saving. Space is money. The more counter space is available, the more merchandizes can be displayed and sold. However, majority of the offerings out there are still too bulky to really make any difference in saving the precious counter real estate.



JIVA HS Series is the solution to the counter space problem. It takes the All-in-One concept to the extreme! With POS unit, touch screen, thermal printer, MSR, smart card reader, Finger Print Sensor and 2nd customer display options occupying a footprint no larger than a standard receipt printer, while offering uncompromising performance – JIVA HS Series allows every inch of the counter space usage to be optimized, thus creating maximum possible profit return for the store owners. This is what space saving is all about!