

Signature

The Economic, Reliable and Stylishly Designed
All in One POS System

► SIGNATURE

SIGNATURE offers expertise in retail, restaurant and hospitality markets, representing **SIGNATURE** Solution of a truly All – Integrated POS system to meet the different market Segments. **SIGNATURE** can be optionally integrated with a Magnetic Stripe Reader, Finger print, VFD type Customer Display or 9.7" 2nd Display



► FEATURES

1. Magnetic + Fingerprint

- Magnetic Stripe Reader (USB, 3 tracks, Non – Encrypted)
- Magnetic + Finger print (combo)

2. Customer Display

- Customer Display VFD 2x20, RS232


3. 2nd LED LCD Display

- 2nd Display 9.7" TFT LED LCD, 1024x768

4. HDD stores up to 500GB Optional SSD(128GB)

► FANLESS & SPILL - PROOF

Patented fanless design with ventilation that allows heat to escape yet prevents liquid from getting into the system.

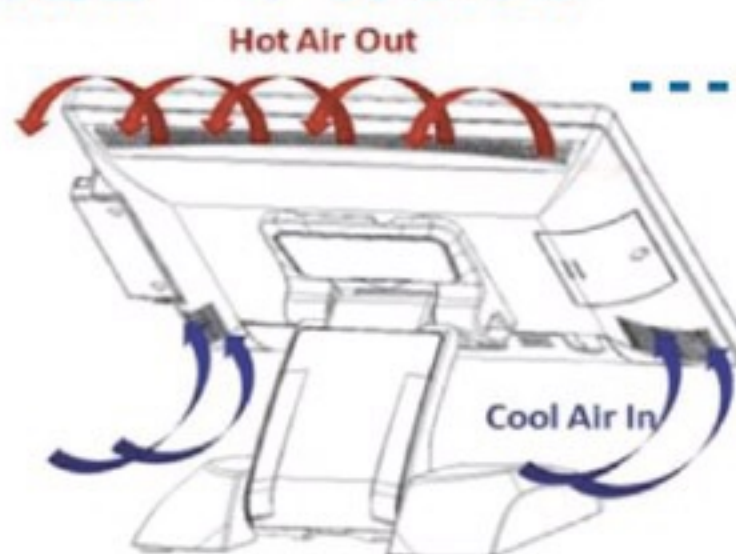

SPECIFICATIONS

Model Number	IT-6200	IT-6300		
CPU Support	Intel® Baytrail-D J1900 2G	Pentium G3320TE 2.3G	Core i3-4330TE 2.4G	Core i5-4570TE 2.7G
System Memory	DDR3L, SO-DIMM x 4GB (Max. 8GB)	DDR3L, SO-DIMM x 2 4GB (Max.16GB)		
Storage	HDD	2.5" 500GB x 1		
	SSD	128GB SSD x 1 (Optional)		
LCD	Size	15" TFT LED LCD Panel		
	Brightness	350cd/m2 (Type)		
	Resolution	1024 x 768		
Touch Screen	Default: True-flat Projected Resistive Touch Optional: True-flat Capacitive Touch			
Tilt Angle	0~120 degree			
External I/O Port	Rear	6 x USB 2.0 Ports	4 x USB 2.0 – 2 x USB 3.0 Ports	
		4 x Serial Port (RJ45); (COM 1-2: 0/5/12V by Bios; COM 3: 0/5v by Bios)	4 x Serial Port (RJ45); (COM 1-3: 0/5/12V by Bios)	
		1 x VGA (Power enable by Bios: + 12V)		
		1 x Cash Drawer Port (RJ11: + 12V)		
		1 x LAN (10/100/1000)		
		1 x Mic-In/Speaker-Out (COMBO Jack)		
		1 x DC In		
Speaker	2 x 2W Speaker (Optional)			
Power	External Power Adaptor, 60W/12V (Lock Type)	External Power Adaptor, 80W/12V (Lock Type)		
IP Rating	IP 65 Compliance			
EMC Safety	CE, FCC Class A			
OS Support	Windows 7 Professional Windows Embedded POS Ready 7 Linux	Windows XP Professional Windows 7 Professional Windows Embedded POS Ready 7 Windows Embedded 8.1 Industry Linux		
Dimensions	(W) 340mm * (D) 284mm * (H) 321mm			
Weight	5.5 kgs			